




26.620.2012.50

Linear Fluorescent Lampholders: General Applications
G5 (T5): Push-Through Lampholders

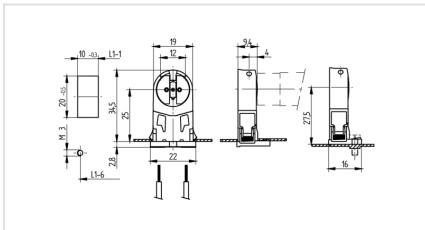

Color:

weiß

Open text field 2:

50

Part no.:

26.620.2012.50



0,5 - 1,0 mm²



T 130

Tm 110



0,5 - 1,5

Description

- For enclosed cut-outs: 10 x 20 mm
- A pair of lampholders provides a lamp length tolerance compensation of 2 mm

Product name:	Lampholder
Farbe:	weiß
Mounting method 1:	Snap-in / screw mount foot
Material:	Gehäuse: PC Rotor: PBT
Lamp type:	54W/8..., Bonalux G5, F049W/965, F14W/T5/8..., F14W/T5/865, F21W/T5/8..., F21W/T5/865, F24W/T5/8..., F24W/T5/865, F28W/T5/8..., F28W/T5/865, F35W/T5/8..., F35W/T5/865, F39W/T5/8..., F39W/T5/865, F49W/T5/8..., F49W/T5/865, F54W/T5/8..., F54W/T5/865, F80W/T5/8..., F80W/T5/865, FH0 24W/8..., FH0 39W/8..., FH024W/860, FH039W/860, FH049W/8..., FH049W/860, FH054W/8..., FH054W/860, FH14W/8..., FH14W/860, FH21W/8..., FH21W/860, FH28W/8..., FH28W/860, FH35W/8..., FH35W/860, FHE 21W/8..., FHE 28W/8..., FHE14W/860, FHE14W/8..., FHE21W/860, FHE28W/860, FHE35W/8..., FHE35W/860, FQ24W/8..., FQ24W/860, FQ24W/940, FQ24W/965, FQ39W/8..., FQ39W/860, FQ49W/940, FQ54W/860, FQ54W/940, FQ54W/965, FQ80W/8..., FQ80W/860, FQ80W/965, G5, LUMILUX T5, Master TL5, Spectralux G5, Standard G5, Starcoat T5, T5 FHE, T5 FHO, T5 Polylux, T5 Standard, TL5 HO 24W/940, TL5 HO 54W/940, TL5 HO 54W/965, TL5H024W/8..., TL5H024W/965, TL5H039W/8..., TL5H049W/8..., TL5H049W/865, TL5H049W/940, TL5H049W/965, TL5H054W/8..., TL5H080W/8..., TL5H080W/865, TL5HE14W/8..., TL5HE21W/8..., TL5HE28W/8..., TL5HE35W/8..., TL5HE35W/865
Lampentyp:	Leuchtstofflampen
Rotor:	with
cULus file no.:	E-92235
Weight:	3
Approval:	cULus
Front Test:	yes
Lamp center:	25 / 27.5
Material thickness:	0.3 - 1.2
T-Marking:	140
Top Test:	yes
Pkg.:	1000